





GTO 609C

6-1/2" two-way car audio component system



INSTALLATION MANUAL

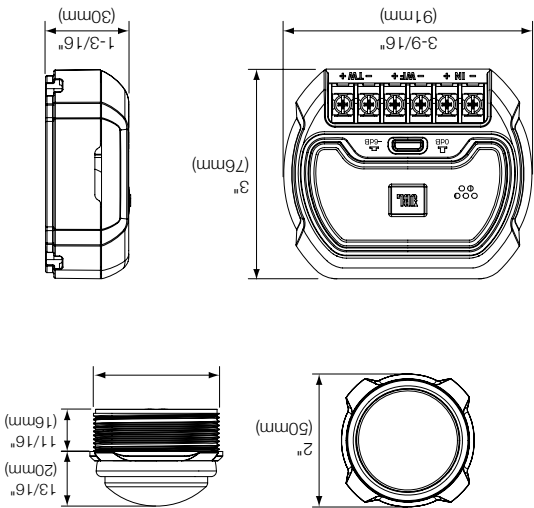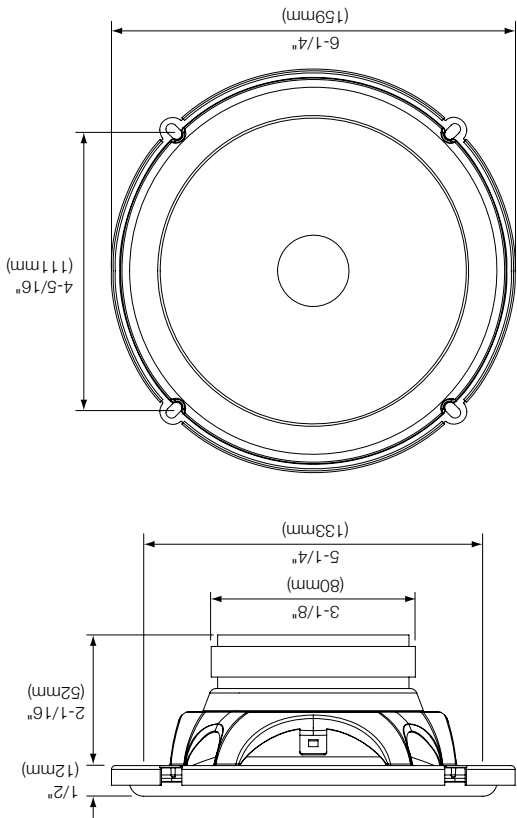

DIMENSIONS


SPECIFICATIONS

THIEE-SMALL PARAMETERS		
BL (T.m)	3.85	TWEETER
DCR (ohms)	2.22	
Mms (g)	14.20	
Sd (cm³)	122.7	
Cms (µm/N)	257	
Vas (liters)	5.44	
Fs (Hz)	83.3	
Qes	1.11	
Qms	7.27	
Qts	0.97	
GTO 609C		
Type	6-1/2" (160mm) two-way component system	TWEETER
Power handling, continuous average	90W	
Power handling, peak	360W	
Frequency response	50Hz – 21kHz	
Nominal impedance	2 ohms	
Sensitivity (2.83V/m)	92dB	
TWEETER		

GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

WARRANTY: Grand Touring® Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local JBL® car audio retailer can help you determine the length of your warranty. To register your product, please visit www.jbl.com.

INSTALLATION

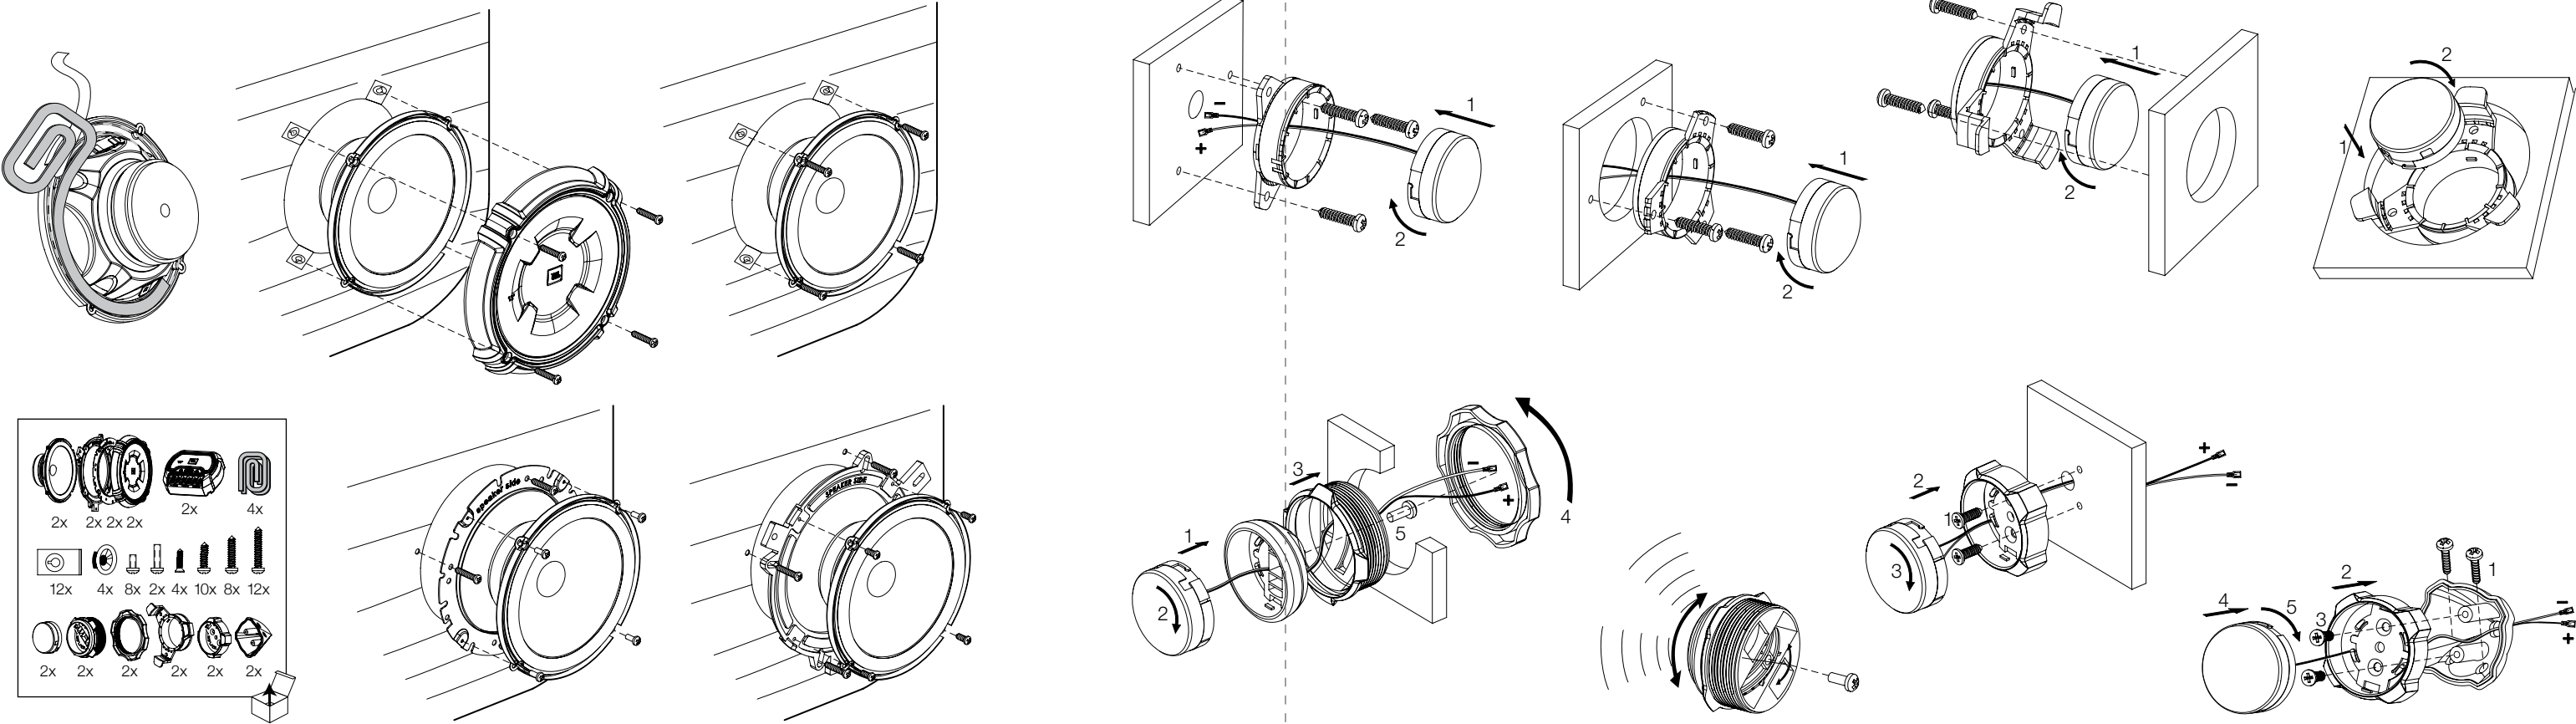

CONNECTIONS

